

WIRELESS SMOKE DETECTOR

with integrated **HEAT SENSOR**


In addition to the smoke chamber this wireless smoke detector has a built-in heat sensor (smokeless fires) which alarms at a temperature range of 54 ° - 70 °C.

- Up to 30 smoke detectors can be connected wirelessly
- Bi-directional transmission (transmitter and receiver in one device), radio frequency: 433 MHz, coded
- Wireless Range: up to 100 meters (open field)
- Mute function (about 10 minutes), e.g. to avoid false alarm by cooking fumes
- 3 different alarm tones to distinguish between smoke or heat alarms and alarm forwarding



Simply safer

The **EASY TEST** button can safely be operated, e.g. with a broomstick.

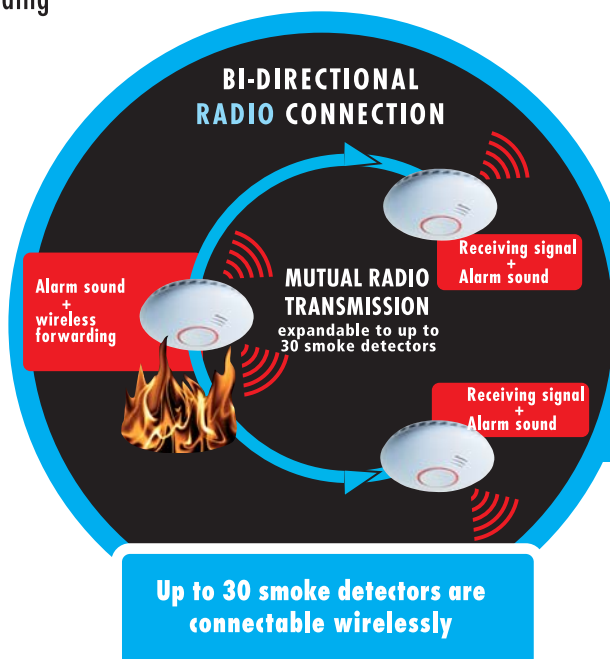

GS-558

WIRELESS SMOKE DETECTOR

| | | |
|-------------------|--|----------------|
| MODEL | GS-558 Wireless Smoke Detector | Art. no. 20569 |
| SCOPE OF DELIVERY | 1x smoke detector incl. 2x 1.5V AA battery | |
| DEVICE | 120 x 38 mm (diameter x height) | |
| GIFTBOX | 128 x 165 x 55 mm (w x h x d) • 240 g | |
| EXPORT BOX | 40 pieces • 525 x 285 x 300 mm (w x h x d) • 11.5 kg | |
| POWER SUPPLY | 2x 1.5V AA battery | |
| ADDITIONAL INFO | Alarm volume > 85db (A) / 3m • Operation temperature: 0 °C to +50 °C | |
| APPROVAL | CE according to EN 14604, BS • European Union | |
| EAN CODE | 4250109155583 | |